TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 10/30






Compact
Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits
Assembly in no time at all - machine can be individually customised

Shipping dimensions in m3

BP 10/30 0,097

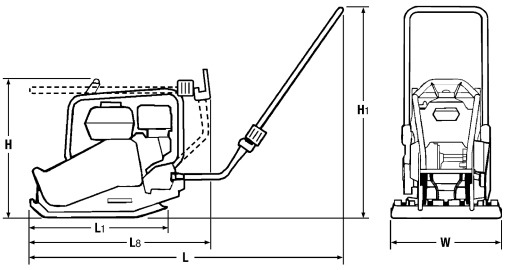

Standard Equipment

- ☑ Vibration insulated steering handle, foldable
- ☑ Detachable steering handle
- ☑ Hand-arm vibrations <5m/s2
- ☑ Automatic shutdown at low oil level
- ☑ Highly wear resistant base plate
- ☑ Recoil starter
- ☑ Fully protected V-belt
- ☑ Carrying handles
- ☑ Single point lifting device
- ☑ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (5l)
- ☐ Spraying system, base plate (320mm)
- ☐ Vulcolan mat
- ☐ Hour meter
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 10/30	433	874	1066	529	700	320

Technical Data		**BOMAG BP 10/30**
Weights		
Operating weight CECE	kg	53
Basic weight	kg	53
Dimensions		
Working width	mm	320
Driving Characteristics		
Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30
Drive		
Engine manufacturer		Honda
Engine type		GX 120
Emission stage		Stage V
Cooling		air
Number of cylinders		1
Performance SAE J 1349	kW	2,4
Speed	min-1	3.600
Drive system		mech.
Fuel		Gasoline
Fuel comsump. aver. during operation	l/h	0,9
Exciter system		
Frequency	Hz	100
Centrifugal force	kN	10
Amplitude	mm	1,23
Capacities		
Fuel	l	2,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG FAYAT GROUP