TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 20/45D





Compact
Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits
Assembly in no time at all - machine can be individually customised



All-round protection
Machine equipped with protective bar as standard

Shipping dimensions in m3

BP 20/45D	0,226

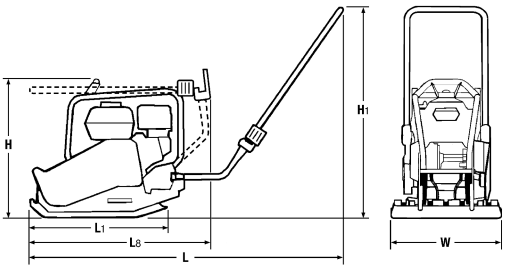

Standard Equipment

- ☑ Vibration insulated steering handle, foldable
- ☑ Detachable steering handle
- ☑ Hand-arm vibrations <5m/s2
- ☑ Automatic decompression
- ☑ Engine protection frame
- ☑ Highly wear resistant base plate
- ☑ Recoil starter
- ☑ Fully protected V-belt
- ☑ Carrying handles
- ☑ Single point lifting device
- ☑ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (10l)
- ☐ Sprinkler system (7l)
- ☐ Spraying system, base plate (450mm)
- ☐ Transport wheels
- ☐ Vulcolan mat
- ☐ Special painting
- ☐ Service Kit
- ☐ Tool kit

Dimensions in mm

	H	H1	L	L1	L8	W
BP 20/45D	627	861	1287	558	800	450

Technical Data		**BOMAG BP 20/45D**
Weights		
Operating weigh	kg	106
Basic weight	kg	106
Dimensions		
Working width	mm	450
Driving Characteristics		
Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30
Drive		
Engine manufacturer		Hatz
Engine type		1B20
Emission stage		Stage V
Cooling		air
Number of cylinders		1
Performance SAE J 1349	kW	
Performance ISO 3046	kW	3,1
Speed	min-1	3.150
Drive system		mech.
Fuel		Diesel
Fuel comsump. aver. during operation	l/h	0,7
Exciter system		
Frequency	Hz	90
Centrifugal force	kN	20
Amplitude	mm	2,00
Capacities		
Fuel	l	3,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP