TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 40/60 D





Maximum longevity
Full protection hood - engine and components protected all around




Precise and save to operate
BOMAG Comfortable control lever



Safe transport
Transport wheels (optional)

Shipping dimensions in m3

BPR 40/60 D 0,623

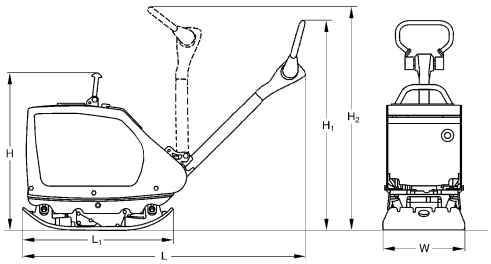

Standard Equipment

- ☑ Fully closed engine protection hood made of high-strength steel
- ☑ Comfortable control lever
- ☑ Height adjustable steering rod
- ☑ Low vibration steering rod
- ☑ Steering rod lockable in transport and working position
- ☑ Vibration and throttle regulation on the steering rod
- ☑ Highly wear-resistant, powder-coated base plate
- ☑ Fully protected V-belt
- ☑ Automatic decompression
- ☑ Recoil starter
- ☑ Hour meter (Electric starter)
- ☑ 3-2-1 Warranty

Optional Equipment

- ☐ Transport wheels (+5kg)
- ☐ Electric starter (+20kg)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Service Kit

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 40/60 D	688	820	1220	1510	762	600

Technical Data		**BOMAG BPR 40/60 D**
Weights		
Operating weight CECE (W)	kg	260
Basic weight	kg	257
Dimensions		
Basic working width	mm	600
Lowest passing height	mm	688
Min. height w. steering in top position	mm	820
Max. height w. steering in top position	mm	1.120
Driving Characteristics		
Working speed, max.	m/min	27
Max. gradeability (dep. on soil con.)	%	32
Drive		
Engine manufacturer		Hatz
Type		1B20
Emission stage		Stage V
Cooling		air
Number of cylinders		1
Performance ISO 3046	kW	3,1
Speed	min-1	3.000
Drive system		mech.
Fuel		Diesel
Fuel comsump. aver. during operation	l/h	0,7
Exciter system		
Frequency	Hz	80
Centrifugal force	kN	40
Amplitude	mm	1,40
Capacities		
Fuel	l	3,0

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP