TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BR 95 E





Greater ease of operation
Comfort start and good access to all control elements




Robust machine design
All around protected and maintenance-free drive components



Comfortable ride and handling
Precise control with low hand-arm vibrations

Shipping dimensions in m3

BR 95 E	0,209

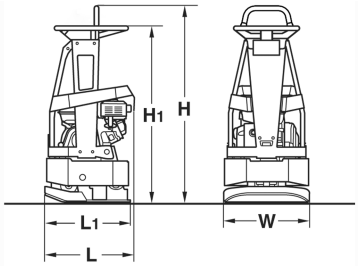

Standard Equipment

- ☑ Vibration damped comfort handle
- ☑ Highly wear resistant base plate
- ☑ Comfort start
- ☑ Maintenance-free brushless electric motor
- ☑ Single point lifting device
- ☑ additional large single-point suspension (removable)
- ☑ 3-2-1 Warranty
- ☑ Fully protected V-belt

Optional Equipment

- ☐ Transport wheels
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ Battery eP 20 (20Ah)
- ☐ Battery eP 28 (28Ah)
- ☐ Standard charger
- ☐ Quick charger
- ☐ Vulcolan mat

Dimensions in mm

	H	H1	L	L1	W
BR 95 E	1030	930	450	450	450

Technical Data		**BOMAG BR 95 E**
Weights		
Operating weight CECE	kg	105
Basic weight	kg	95
Dimensions		
Working width	mm	450
Driving Characteristics		
Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30
Drive		
Engine type		Asynchronous motor
Emission stage		no emissions
Cooling		air
Performance	kW	2,6
Speed	min-1	4.350
Drive system		electric
Exciter system		
Frequency	Hz	90
Centrifugal force	kN	15
Amplitude	mm	1,60
Electric equipment		
battery, type		Li-Ion
Operating voltage	V	51

Technical modifications reserved. Machines may be shown with options.

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP