BOMAG
FAYAT GROUP


TECHNICAL DATA


TRACTOR MOUNTED SPREADER

BS 3, BS 5





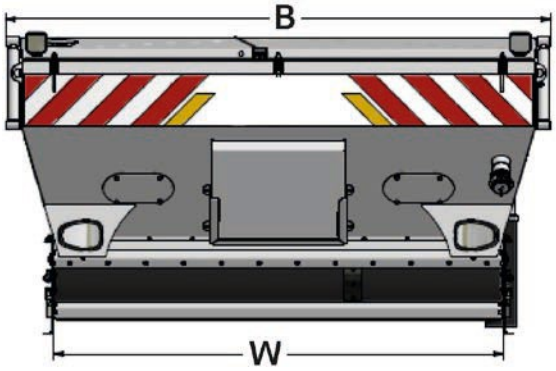

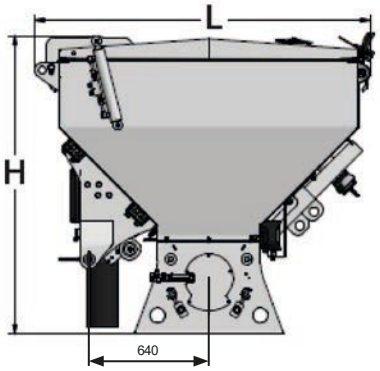

Standard equipment

- ☑ Speed-dependent dosing
- ☑ Radar sensor for speed detection
- ☑ Compressed air filling from front
- ☑ Variable working width
- ☑ Large hydraulic flap for big bag/excavator/silo filling
- ☑ 4.3" display for machine control from the tractor cab

Optional equipment

- ☐ Weighing plate for dosage control
- ☐ Filter System „Bag filter"
- ☐ Camera monitoring
- ☐ Traffic lighting
- ☐ Additional working lights
- ☐ Custom color

Dimensions in mm	B	H	L	W
BS 3	2922	1598	1795	2412
BS 5	2922	2048	1795	2412

Technical data		**BOMAG BS 3**	**BOMAG BS 5**
Type		Tractor mounted	Tractor mounted
Capacity	m³	3,5	5,5
Output*	kg/m²	3 to 50	3 to 50
Working width	m	0,8 / 1,6 / 2,4	0,8 / 1,6 / 2,4
Weight (empty)	kg	1.290	1.405
Weight (full)	kg	4.290	6.405

Tractor requirements

Tractor lifting device		Three-point category 2 and 3	
Recommended travel drive		stepless 0 to V max	
Lifting capacity	t	5	7
2 double-acting valves for hydr. Supply	l/min	50	50

(Unpressurized return line recommended)

* Crawling gear required

PRE 910 94 010 120123 Sa

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (0)6742 – 1000
Fax (0)6742 – 3090

BOMAG
FAYAT GROUP