
TECHNICAL DATA

SINGLE DRUM ROLLER

BW 212 D-5 PL



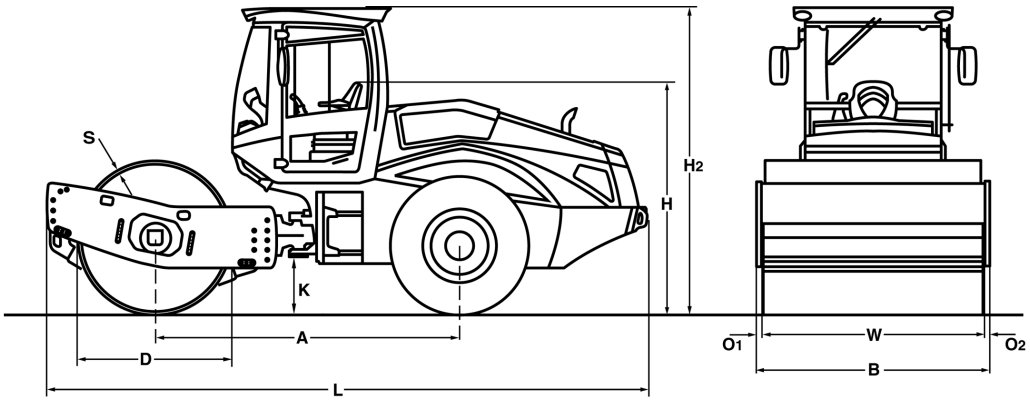

Dimensions in mm

	A	B	D	H	H2	K	L	O1	O2	S	W
BW 212 D-5 PL	2975	2270	1500	2260	2990	490	5870	70	70	25	2130

Shipping dimensions in m3	**without ROPS**	**with ROPS**
BW 212 D-5 PL	30,114	39,841

Machine type	**Compaction output (m3/h)**			
	Rock fill	**Gravel, sand**	**Mixed soil**	**Silt, clay**
BW 212 D-5 PL	470-940	300-600	240-480	120-240

Machine type	**Compacted layer thickness (m)**			
	Rock fill	**Gravel, sand**	**Mixed soil**	**Silt, clay**
BW 212 D-5 PL	0,75	0,50	0,40	0,20

Technical Data

BOMAG
BW 212 D-5 PL

Weights

Grossweight	kg	13.700
Operating weight CECE w. ROPS-cabin	kg	11.450
Axle load, drum CECE	kg	6.510
Axle load, wheels CECE	kg	4.940
Static linear load CECE	kg/cm	30,6

Dimensions

Working width	mm	2.130
Track radius, inner	mm	3.680

Driving Characteristics

Speed (1)	km/h	0- 5,0
Speed (2)	km/h	0- 6,0
Speed (3)	km/h	0- 8,0
Speed (4)	km/h	0- 11,0
Max. gradeability without/with vibr.	%	47/45

Drive

Engine manufacturer		Deutz
Engine type		TCD 3.6 L4
Emission stage		Stage V / Tier4f
Exhaust gas aftertreatment		DOC+DPF+SCR
Cooling		Liquid
Number of cylinders		4
Performance ISO 3046	kW	95,0
Performance SAE J 1995	hp	128,0
Speed	min-1	2.000
Fuel		Diesel
Electric equipment	V	12
Drive system		hydrost.
Drum driven		standard

Drums and Tyres

Tyre size		23.1-26 12PR

Brakes

Service brake		hydrost.
Parking brake		hydromec.

Steering

Steering system		oscil.artic.
Steering method		hydrost.
Steering / oscillating angle +/-	grad	35/12

Exciter system

Drive system		hydrost.
Frequency	Hz	30/34
Amplitude	mm	1,95/1,00
Centrifugal force	kN	240/158
Centrifugal force	t	24,5/16,1

Capacities

Fuel	l	250,0

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- ☑ BOMAG ECOMODE
- ☑ Warning, information and operation displays with LCD
- ☑ Hydrostatic travel and vibration drive
- ☑ Hydrostatic articulated steering
- ☑ Articulated joint lock
- ☑ Rear axle with twin spring accumulator brakes
- ☑ Self locking differential
- ☑ Warning horn
- ☑ Single lever control for travel and vibration
- ☑ Seat with arm rest and adj. for position and height
- ☑ 2 Scraper
- ☑ Emergency STOP
- ☑ Back-up alarm
- ☑ Working lights front / rear
- ☑ Loading mode
- ☑ Battery disconnect switch
- ☑ BOMAG TELEMATIC
- ☑ Tinted safety glass panes

Optional Equipment

- ☐ * ROPS/FOPS cabin with seat belts
  - Sliding window
- ☐ Air condition
- ☐ Rearview camera
- ☐ ECONOMIZER
- ☐ TERRAMETER
- ☐ BOMAG ECOSTOP
- ☐ Fleet Management Access
- ☐ Padfoot segment kit
- ☐ Radio (DAB)
- ☐ Indicator and hazard lights
- ☐ Special painting
- ☐ Rotary beacon
- ☐ Pre start cabin heating
- ☐ Environmentally compliant hydraulic oil
- ☐ Comfort package: Adjustable seat and adjustable steering column
- ☐ Comfort package PLUS:
  -Air suspended seat, swivel
  -Adjustable steering column
- ☐ Comfort package PLUS 2:
  -Air suspended seat, swivel
  -Adjustable steering column
- ☐ Measuring- and machine data interface
- ☐ LED Working lights (Cabin)
- ☐ Reversing alarm buzzer with broad band audio
- ☐ 360° Camera system
- ☐ Remote Control
- ☐ Tractor tires
- ☐ Radial tires
- ☐ Protective ventilation pre-installation
- ☐ Cold start device
- ☐ BOMAP GPS antenna set
- ☐ BOMAP GPS antenna holder
- ☐ Tablet holder set
- ☐ JOBLINK measuring technology interface

* Standard delivery with CE conformity (valid within European Union)

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

BOMAG
FAYAT GROUP