TECHNICAL DATA

BOMAG Screed

S 500-5 TV



MAGMALIFE

Greatest durability

QUICKCOUPLING

Shorter set-up times

Technical Data

BOMAG
S 500-5 TV


Screed

Max. working width	mm	9000
Roof profile	%	-2.5 …. +4.5
Basic weight	kg	3775
Basic width retracted	mm	2550
Basic width extended	mm	5000
min. width with reducing shoes	mm	1650
Placement thickness	mm	300
Screed/sole plate length	mm	375
Screed/sole plate thickness	mm	12
Heating		electric
Tamper frequency	Hz	10-30
Vibration frequency	Hz	10-60

Mechanical extensions

Attachment element 1	mm	250
Attachment element 2	mm	750
Attachment element 3	mm	1250

Technical modifications reserved. Machines may be shown with options.

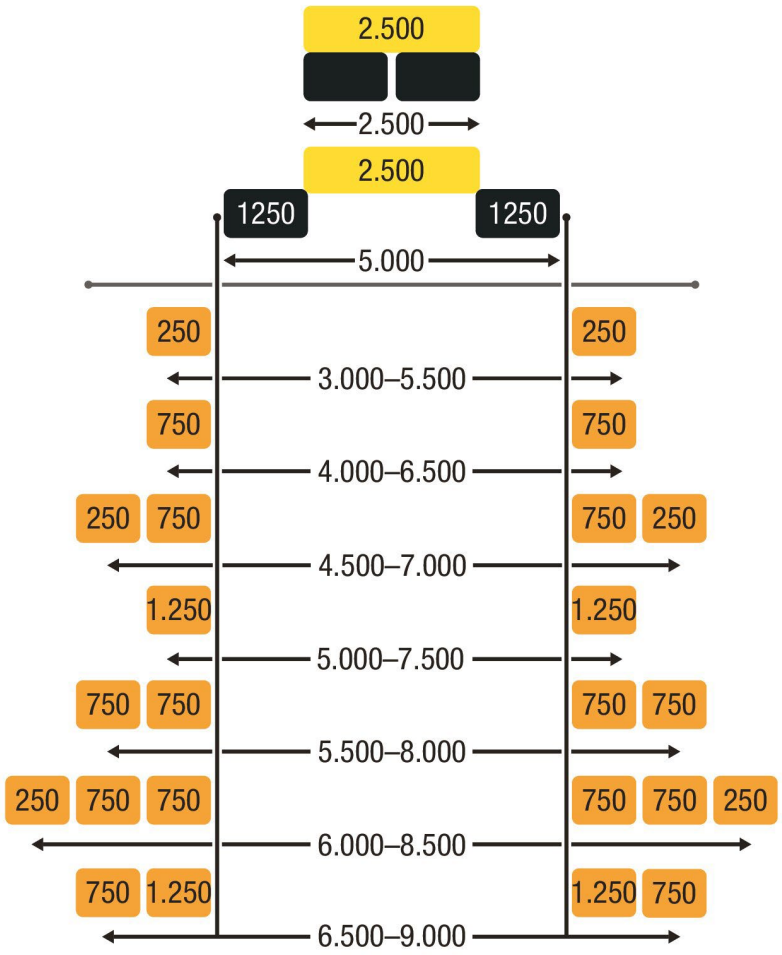

PRE89522010 230426 Sa

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (+49) 6742 - 1000
Fax (+49) 6742 - 3090

BOMAG
FAYAT GROUP