

LETTO

ASPHALT CONTAINER

ASPHALT CONTAINER

AF25
AF25H

FM

OLETTO AF25

Asphalt container for road maintenance



The OLETTO asphalt container is the perfect solution in modern road maintenance. The hotbox keeps the asphalt hot all day, and is the ideal pothole patcher for repairing asphalt surfaces after laying pipelines, or any other job where you have to patch with small amounts of asphalt.


The advantages of the hotbox are many such as warm asphalt all day, reduced wage costs, by processing easier and much faster, fully automatic temperature control and a hydraulic auger for easy unloading.


The OLETTO thermo asphalt container consists of two separate heating chambers. The chambers are insulated with Rockwool which prevent the asphalt from cooling, and is equipped with new technology including a gas saving system in both chambers.

A HARDOX auger with geared drive leads the asphalt out through a chute to the desired place for repair. The auger is hydraulic driven either by using the hydraulic of the truck or an integrated hydraulic station driven by a gas- or diesel engine.





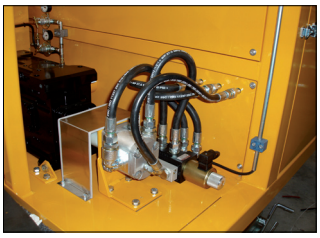

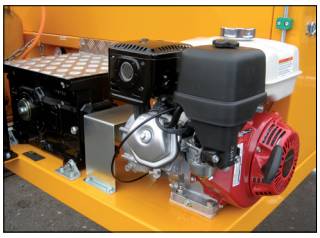

TECHNICAL SPECIFICATIONS

	AF25	AF25H
Chambers	1	1
Thermometer	Analog	Analog
Temperature regulation	Manual	Manual
-	Automatic	Automatic
Burner type	Direct flame	Direct flame
-	Lamella	Lamella
Max. volume	1,4 m³	1,8 m³
Max capacity	3,1 t	4,0 t
Weight	950 kg	980 kg
Gas consumption	0,5 kg/h	0,5 kg/h
Standard colour	RAL1007	RAL1007
Insulation	50 mm Rockwool	50 mm Rockwool
Gas pressure	0,75 bar	0,75 bar

ADDITIONAL EQUIPMENT AF25



Select the hotbox based on your requirements

A lot of additional equipment are available for the AF25 hotbox.
Therefore it is easy to select a hotbox with your desired requirements.


- Bituslip sprayer
- Hydraulic lift for vibrator
- External gas burner
- Fire extinguisher in a box
- Bonding Agent tank 100L
- Dicky box
- Hydraulic opening of doors
- Extended chute for high truck
- Advanced gas control
- Permanent on a truck
- Permanent on a trailer
- Heating around the auger outlet
- Mechanical legs
- Multi lift system


Automatic temperature control


Mechanical legs



Platform for vibrator

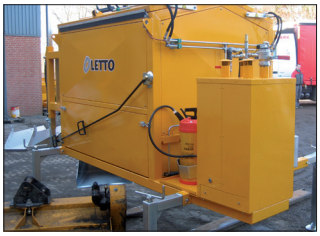


Bonding Agent tank 100L



Hydraulic opening of doors



10L Bituslip sprayer

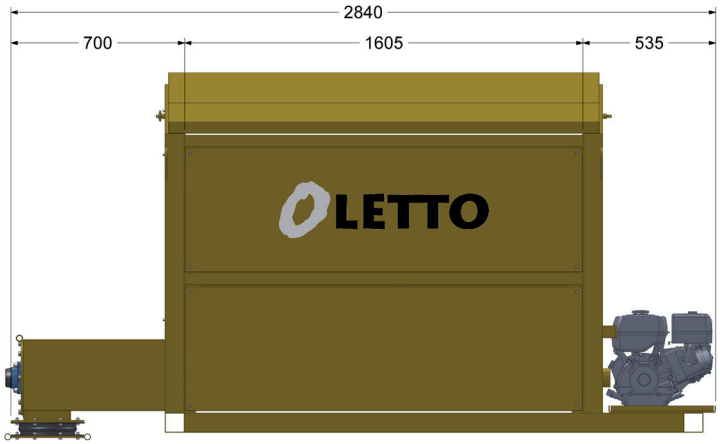



TECHNICAL SPECIFICATIONS

FM MASKINER A/S
Kirkevej 6, DK-6621 Gesten

Tel. +45 7555 7022, Fax +45 7555 7500
www.fm-maskiner.dk

© FM 2012, Ret til ændringer forbeholdes